
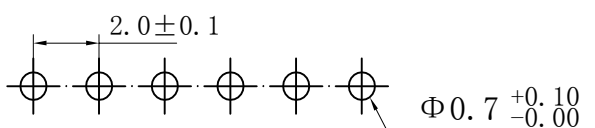


Specifications:
 Operating Voltage: 250V AC/DC
 Current Rating: 2A AC/DC
 Withstand Voltage: 800V AC/Minute
 Contact Resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 500m\Omega$
 Operating Temperature: $-25^{\circ}C \sim +85^{\circ}C$
 Material: PA66 UL94V-0
 PIN Brass Tin-plated

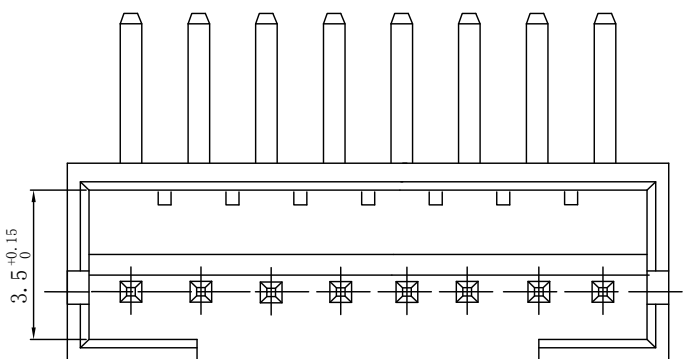

P数	尺寸 (mm)	
	A	B
2	2.0	6.0
3	4.0	8.0
4	6.0	10.0
5	8.0	12.0
6	10.0	14.0
7	12.0	16.0
8	14.0	18.0
9	16.0	20.0
10	18.0	22.0
11	20.0	24.0
12	22.0	26.0
13	24.0	28.0
14	26.0	30.0
15	28.0	32.0
16	30.0	34.0

PCB LAYOUT

一般公差 TOLERANCES X. ± 0.40 .XX ± 0.20 .X ± 0.30 .XXX ± 0.10 ANGLES $\pm 2^{\circ}$		深圳市宏利电子有限公司 Shenzhen Holy Electronic Co.,Ltd	
检验尺寸标示 SYMBOLS \odot \ominus INDICATE CLASSIFICATION DIMENSION \odot MARK IS CRITICAL DIM. \ominus MARK IS MAJOR DIM.	工程 图号 PH20-nAW 品名 PH2.0-nAW 弯针 TITLE PH2.0mm Pitch AW DIP CONN	制图 (DR) *10/03/22 审核 (CHKD) 核准 (APPD) Rigo Lu	张数 (SHEET) 1 OF 1 尺寸 (SIZE) A4 版本 (REV) 0
表面处理 (FINISH) 比例 (SCALE) 1:1 单位 (UNITS) mm			

修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE
-	-	-	-