
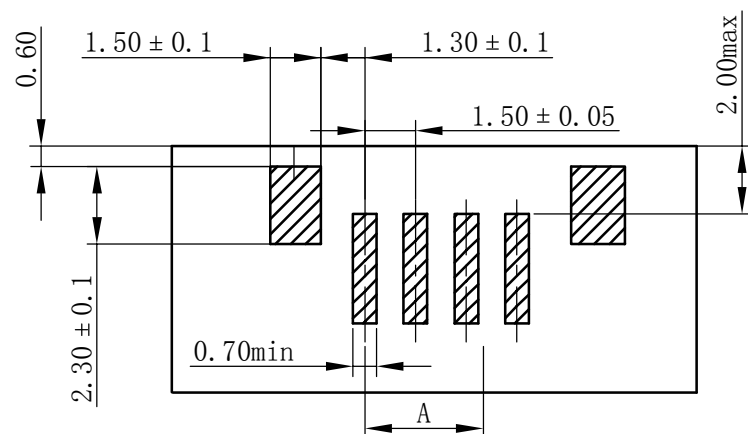


- 1< Current rating:1A AC\DC (AWG #26)
- 2< Voltage rating: 50V AC\DC
- 3< Temperature range: -25= to 85=
- 4< Contact resistance:Initial value/20m Ω max
Electrical properties
- 5< Insulation resistance:500M Ω min
- 6< Withstanding voltage:500V AC/ minute
- 7< Applicable wire:AWG #30 to #26

Environmental controls

- 1< Banned contains SS - 00259 are restricted substances.
- 2< The corresponding issued by SGS or ITS icp-aes data,
Not the material in a list, and validity.

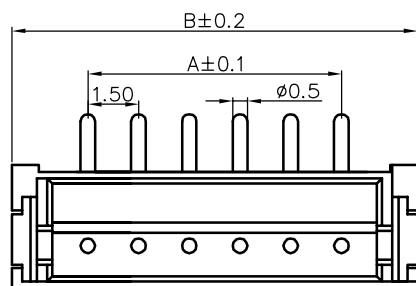

PCB LAYOUT

P数	A	B
2	1.50	6.00
3	3.00	7.50
4	4.50	9.00
5	6.00	10.50
6	7.50	12.00
7	9.00	13.50
8	10.50	15.00
9	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.0

一般公差 TOLERANCES X. ±0.40 .XX ±0.20 .X ±0.30 .XXX ±0.10 ANGLES ±2°		深圳市宏利电子有限公司 Shenzhen Holy Electronic Co.,Ltd	
检验尺寸标示 SYMBOLS INDICATE CLASSIFICATION DIMENSION	工程 图号 ZH15LB-nP	制图 (DR) *12/5/16 审核 (CHKD)	
MARK IS CRITICAL DIM. MARK IS MAJOR DIM.	品名 ZH1.5mm - nP 立贴	核准 (APPD) Rigo Lu	
表面处理 (FINISH)	比例 (SCALE) 1:1	单位 (UNITS) mm	张数 (SHEET) 1 OF 1
修订 REV		修改摘要 REVISION DESCRIPTION	日期 DATE
		签名 SIGNATURE	尺寸 SIZE A4
			版本 REV 0

△	-	-	-
修订	修改摘要	日期	签名
REV	REVISION DESCRIPTION	DATE	SIGNATURE