
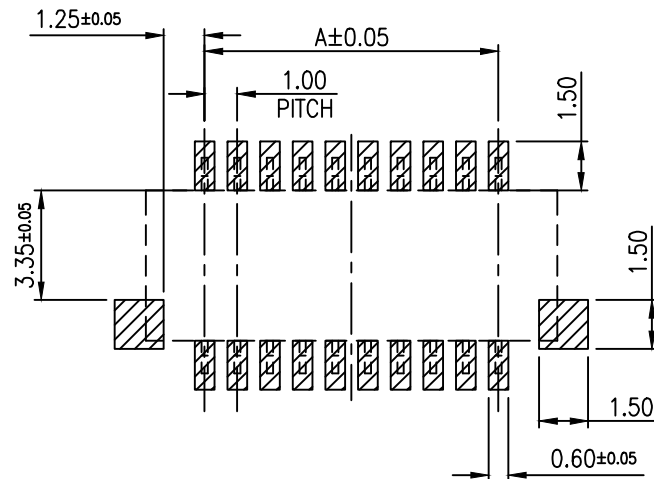
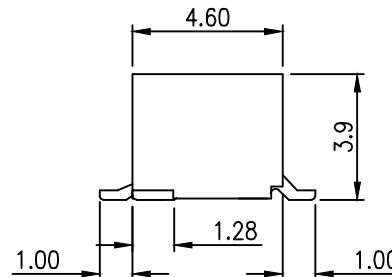
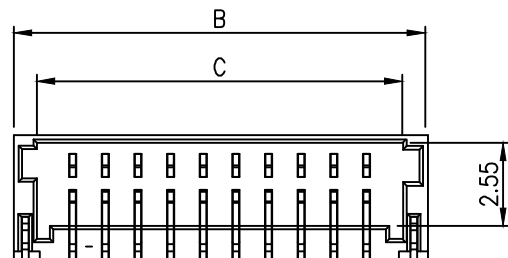


Specifications:
Housing: LCP UL94-V0 Color: Nature
Contact: Phosphor Bronze Gold OR Tin Plated
Current Rating: 1A AC/DC
Withstand Voltage: 50V AC/Minute
Operating Temperature: -25°C ~ +85°C

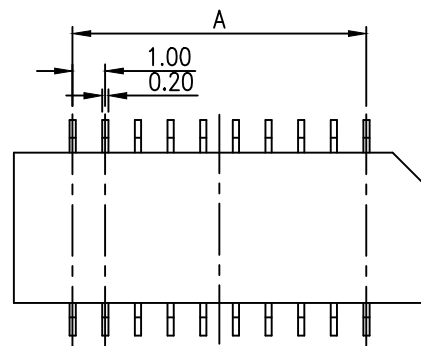

RECOMMENDED PCB LAYOUT

CKT	Dim A	Dim B	Dim C
20	9.0	12.6	11.2
30	14.0	17.6	16.2
40	19.0	22.6	21.2

一般公差 TOLERANCES X. ±0.40 .XX ±0.20 .X ±0.30 .XXX ±0.10 ANGLES ±2°			深圳市宏利电子有限公司 Shenzhen Holy Electronic Co.,Ltd		
检验尺寸标示 SYMBOLS INDICATE CLASSIFICATION DIMENSION MARK IS CRITICAL DIM. MARK IS MAJOR DIM.					
表面处理 (FINISH) 			品名 WTB1.0mm CW - 2*nP H4.0 母座	审核 (CHKD) 	
比例 (SCALE) 1:1			TITLE 1.0mm Wire To PCB H4.0 Connector	核准 (APPD) Rigo Lu	
单位 (UNITS) mm				张数 (SHEET) 1 OF 1	
尺寸 (SIZE) A4			版本 (REV) 0		

修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE
-	-	-	-